

ADDENDUM No. 1  
TO THE  
CONTRACT DOCUMENTS FOR CONSTRUCTION OF  
BRADFORD AVENUE RAMP REPLACEMENT  
PROJECT #24PW07

THIS ADDENDUM IS HEREBY MADE A PART OF THE CONTRACT DOCUMENTS DATED March 14, 2024, TO THE SAME EXTENT AS THOUGH IT WERE ORIGINALLY INCLUDED THEREIN.

ISSUED THIS 28<sup>th</sup> DAY OF MARCH, 2024.

CITY OF ROSEBURG  
PUBLIC WORKS DEPARTMENT  
900 SE DOUGLAS AVENUE  
ROSEBURG, OREGON 97470  
(541) 492-6730

This addendum forms a part of the Contract Documents and modifies the original Bidding Documents dated March 14, 2024 as noted below. Acknowledge receipt of this addendum in the space provided on the Bid Form. Failure to do so may subject the Bidder to disqualification.

**Clarifying Information:**

**Question #1:** Is there demolition Bid Item?

**Response:** Please refer to SECTION 00190.15 ITEM #9

**Question #2:** What's the Valley Gutter thickness, and what is it billed under?

**Response:** Valley Gutter is 6" thick. Please see attached COR Detail (PW-009). Payment is under Bid Items A-12 & B-5.

**Question #3:** You call out seeding, is there Clearing and Grubbing?

**Response:** There are no separate bid items for Clearing and Grubbing. Please refer to SECTION 01030.


**Adding Detail to Plan:**

1. PW-009


**END OF ADDENDUM NO. 1**




Gaoying Vigoa  
Project Manager  
Issued March 28, 2024

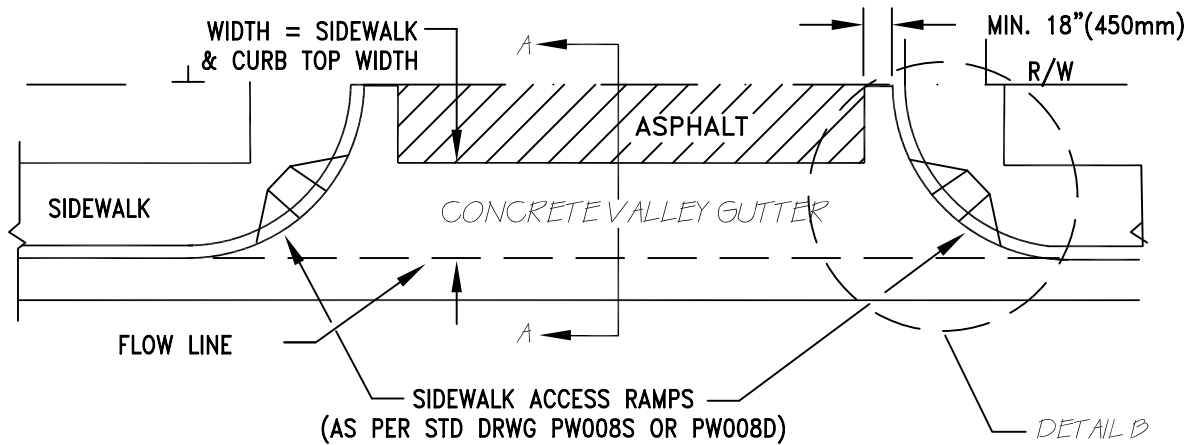

PLAN VIEW

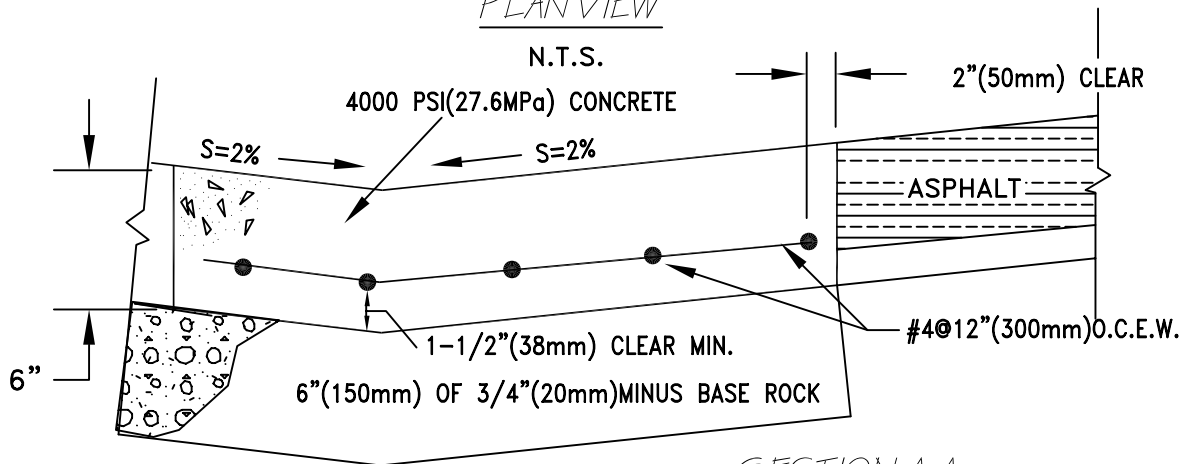

SECTION A-A

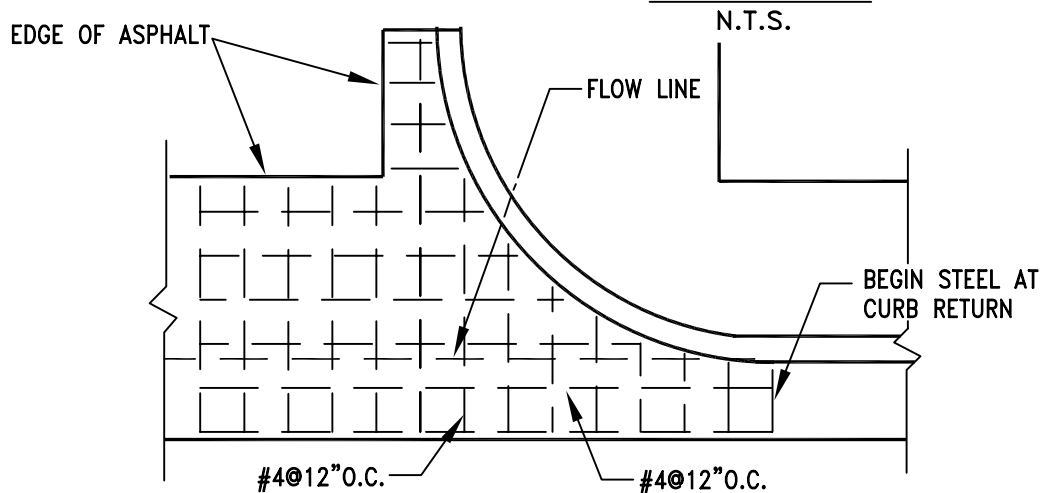

DETAIL B  
N.T.S.

CITY OF ROSEBURG  
PUBLIC WORKS DEPARTMENT  
CHRIS S. BERQUIST, DIRECTOR

DATE: 6/24/94

SCALE: NTS

BY: RLP

CHK: CSB

STANDARD DRAWING

No. PW-009

DRWN: RLP

REV: APR 97

MONOLITHIC CURB & GUTTER  
& VALLEY GUTTER

APPRVD: CSB

REV:

PROJECT No: N/A

REV:

